



RHINO HOIST
CHAIN HOIST & LIFTING


CHAIN BLOCK-TECLE MANUAL

RHINO HOITS - TECLE MANUAL DE CADENA

Capacity	(tonnes)	0.5	1	1.5	2	2	3	3	5	10	20	30
Product No.		VIT05	VIT10	VIT15	VIT20V	VIT20	VIT30B	VIT30	VIT50	VIT100	VIT200	VIT300
No. of Falls		1	1	1	1	1	1	2	2	4	8	12
Load Chain	(mm)	5x15	6.3x19	7.1x21	7.1x21	8x24	9x27	7.1x21	9x27	9x27	9x27	9x27
Load Chain Grade		100	100	100	100	100	100	100	100	100	100	100
Pull to Rated Load1	(N)	296	415	415	525	434	449	406	415	410	410x2	410x2
Pull to Rated Load2	(N)	237	366	366	519	395	410	357	380	410	410x2	410x2
Proof Load	(tonnes)	0.75	1.5	2.25	3.0	3.0	4.5	4.5	7.5	15.0	25.0	37.5
Hand Chain	(mm)	5x22.2x18 / 5.5x23.6x19										
Standard Lift	(m)	3	3	3	3	3	3	3	3	5	5	5
Net Weight	(kg)	9.0	12.2	14.5	15.5	21.0	34.0	22.0	40.0	89.4	214.7	278
Gross Weight	(kg)	9.4	12.7	15.0	16.0	22.2	34.5	22.7	41.5	96.9	225.7	293
Extra Wt. per m	(kg)	1.42	1.73	1.97	1.97	2.58	2.76	3.07	4.71	8.23	16.46	23.5
Dimensions	a (mm)	127	147	147	147	179	182	147	179	179	207	350
	b (mm)	144	157	174	174	204	263	206	263	367	873	694
	c (mm)	285	315	340	355	380	550	475	600	740	870	1,300
	f (mm)	27	33	33.5	37	37	43.5	43.5	51	64	82	82
	g (mm)	35	45	47	52	52	62.5	62.5	78	-	-	-

0.5 t, 1 t, 1.5 t, 2 t & 3 t

3 t, & 5 t

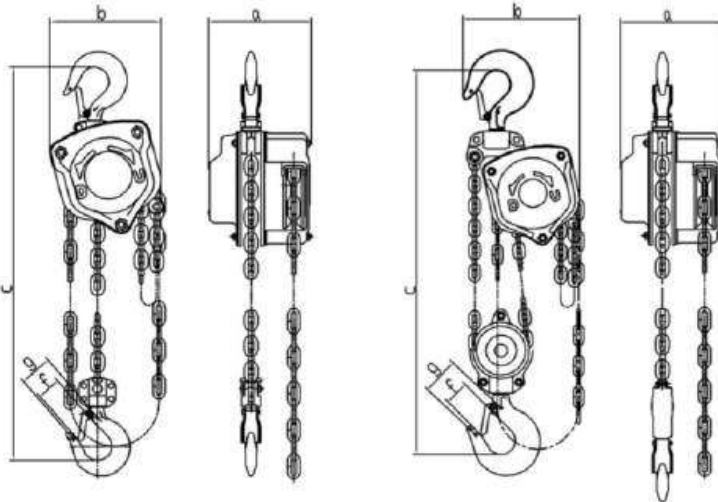

CERTIFICACIONES

ENSAYOS DE CARGA EN:

